

Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required. The product of Hillsdale Furniture, LLC is designed for residential use only. Customer Service Phone Number: 502-562-0000

HARDWARE LIST

- A (2) 1/4" x 1-1/4" Sunk Bolt
- B (8) 1/4" x 5/8" Allen Bolts
- C (4) 1/4" x 1/2" Allen Bolts
- D (12) 1/4" Spring Washers
- E (8) 1/4" x 16mm Metal Washers
- F (4) 1/4" x 13mm Metal Washers
- G (4) 5 x 15mm Screw
- H (1) 1/4" Allen Wrench









PARTS LIST

- I (1) Chair Back
- J (1) Seat Base
- K (1) Cross Brace
- L (2) Front Legs
- M (1) Seat Cushion

STEP 1

Begin assembly by attaching the Seat Base (J) to the Stool Back (I) by using 2 Allen Bolts (B), 2 Spring Washers (D) and 2 Metal Washers (E) per each side. See **Figure 1**.

Do not tighten bolts for this step.

PART	QTY	HARDWARE	PART	QTY	HARDWARE
A	2		B	8	
C	4		D	12	
E	8		F	4	
G	4		H	1	

STEP 2

Next attach the Cross Brace (K) to the Stool Back (I) by using 2 Metal Washers (F), 2 Spring Washers (D) and 2 Allen Bolts (C). See **Figure 2**.

STEP 4


Next attach the Front Legs (L) to the Cross Brace (J) using 1 Allen Bolt (C), 1 Spring Washer (D) and 1 Metal Washer (F) per leg. See **Figure 4**. Tighten all bolts from Steps 1-4.

STEP 3

Next attach the Front Legs (L) to the Seat Base (J) using 2 Allen Bolts (B), 2 Spring Washers (D) and 2 Metal Washers (E) per leg as well as 1 Sunk Bolt (A) from the top. See **Figure 3**.

STEP 5

Finally attach the Seat Cushion (M) to the Seat Base (J) with 4 Screws (G) from the bottom. Assembly is now complete.

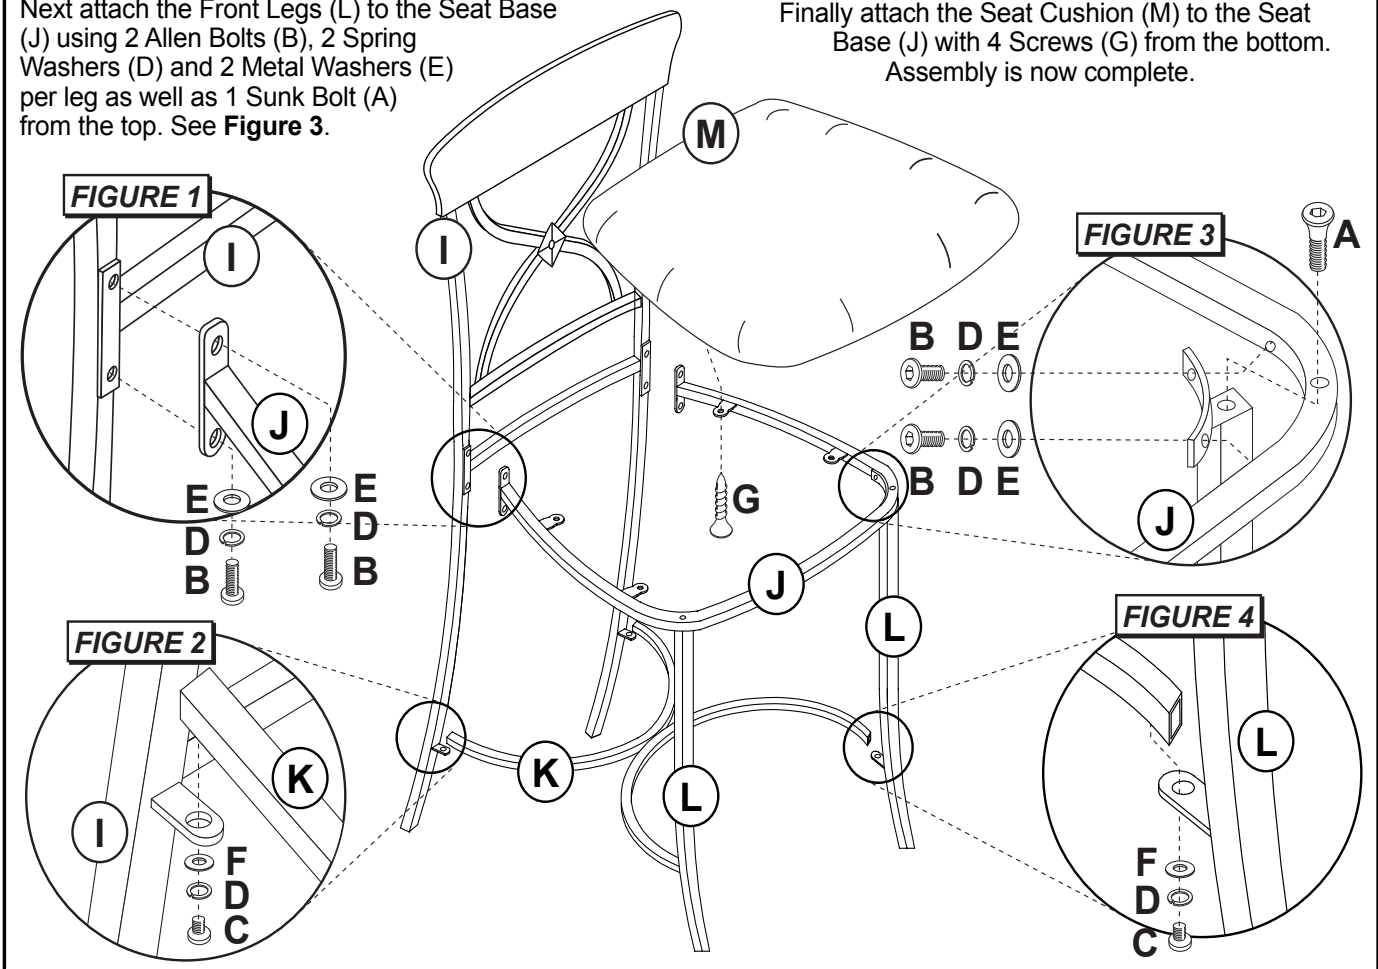

CARE & MAINTENANCE: The touch of a soft cloth is all the maintenance the finish will ever need. Please do not use harsh or abrasive cleaners for polishing, as they may cause damage to the finish. Periodic checks are recommended to make sure that all bolts, screws and nuts are securely tightened.

TOC20120620

Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required. The product of Hillsdale Furniture, LLC is designed for residential use only. Customer Service Phone Number: 502-562-0000

HARDWARE LIST

- A (4) 5/16" x 19mm Flat Washers
- B (8) 5/16" Spring Washers
- C (8) 5/16" x 2-3/4" Allen Bolts
- D (1) 5mm Allen Wrench
- E (8) 1/4" x 12mm Flat Washers
- F (8) 1/4" Spring Washers
- G (8) 1/4" x 1-1/4" Allen Bolts
- H (1) 4mm Allen Wrench
- I (4) 5/16" x 16mm Flat Washers

PARTS LIST

- J (1) Table Top
- K (1) Metal Ring
- L (1) Leg Brace
- M (4) Legs










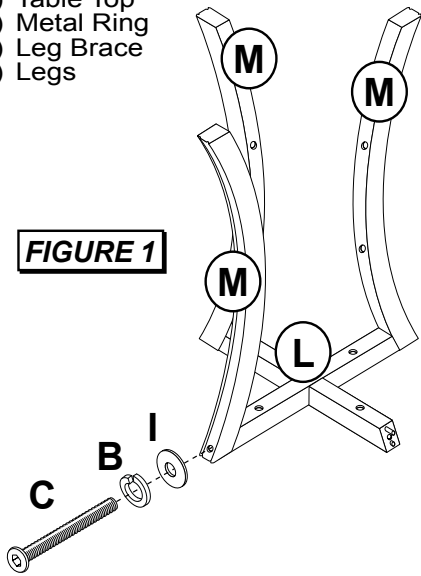
PART	QTY	HARDWARE	PART	QTY	HARDWARE
A	4		B	8	
C	8		D	1	
E	8		F	8	
G	8		H	1	
I	4				

FIGURE 1



STEP 1

Begin assembly by attaching 3 of the Legs (M) to the Leg Brace (L) by lining up the rods on the brace with the holes on the leg and secure with 1 Allen Bolt (C), 1 Spring Washer (B) and 1 Flat Washer (I) for each leg. See **Figure 1**.

STEP 2

Slide the Metal Ring (K) into place in between the three Legs (M) and attach them to each other using 2 Allen Bolts (G), 2 Spring Washers (F) and 2 Flat Washers (E). Then attach the remaining Leg (M) to the Leg Brace (L) and the Metal Ring (K) in the same fashion as the previous legs. See **Figure 2**. Tighten all bolts with the Allen Wrenches (D & H) provided.

STEP 3

Turn the Table Top (J) upside down and lay it on a clean smooth surface.

STEP 4

Finally attach the Leg Brace (L) assembly to the Table Top (J) using 4 Allen Bolts (C), 4 Spring Washers (B) and 4 Flat Washers (A). Tighten all bolts. The assembly is now complete. See **Figure 3**.

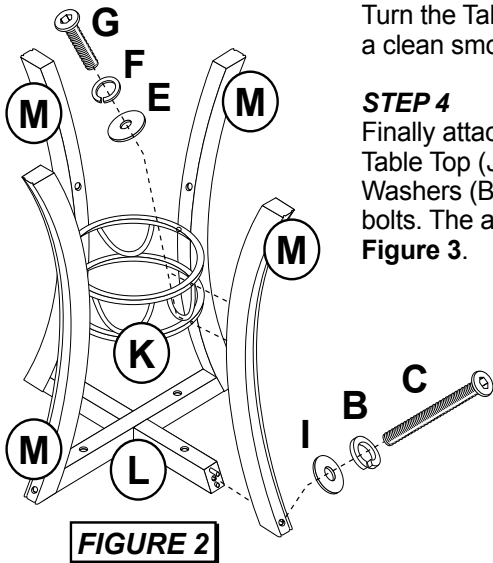


FIGURE 2

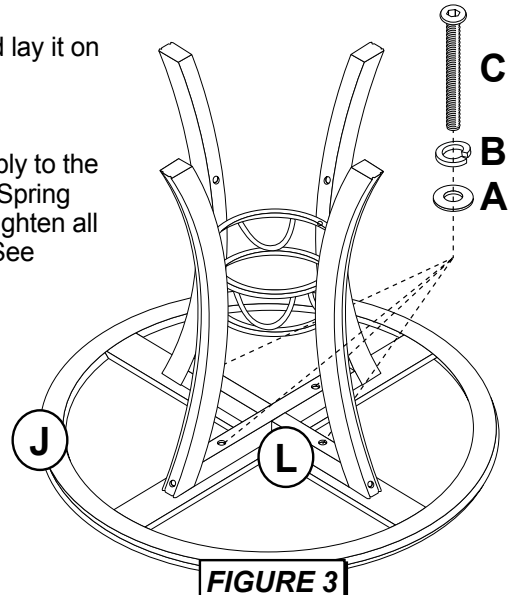


FIGURE 3

CARE & MAINTENANCE: The touch of a soft cloth is all the maintenance the finish will ever need. Please do not use harsh or abrasive cleaners for polishing, as they may cause damage to the finish. Periodic checks are recommended to make sure that all bolts, screws and nuts are securely tightened.