


Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required. Customer Service Phone Number: 502-562-0000

HARDWARE LIST

- A (12) Allen Bolts 1/4" x 5/8"
- B (12) Spring Washers 1/4"
- C (12) Flat Washers 1/4"
- D (4) Wood Screws
- E (1) Allen Wrench

PARTS LIST

- F (1) Stool Top
- G (4) Legs
- H (1) Support Ring
- J (1) Seat Cushion

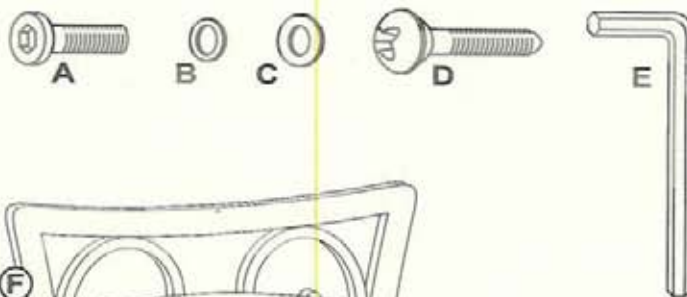

STEP 1


Begin assembly by attaching each Leg (G) to the bottom of the Stool Top (F) ring using 2 Allen Bolts (A), 2 Spring Washers (B) & 2 Flat Washers (C) per each leg. Do not fully tighten bolts.

STEP 2

Attach the Support Ring (H) to the inside of each Leg (G) using 1 Allen Bolt (A), 1 Spring Washer (B) & 1 Flat Washer (C) per each leg. Tighten all bolts from steps 1 & 2 only using the Allen Wrench-(E) that has been provided.

STEP 3

Attach the Seat Cushion (J) to the top of the ring on the Stool Top (F) using 4 Wood Screws (D) to secure tight in place. Only tighten screws using a phillips head screwdriver (not included). The assembly is now complete.

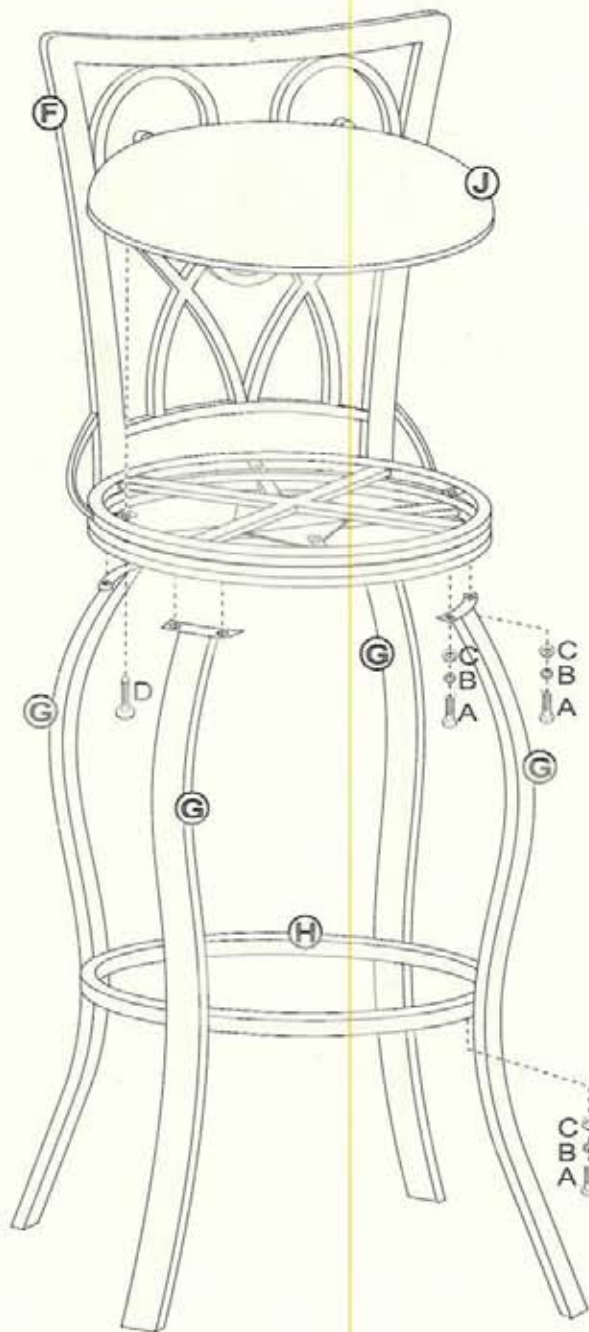

CARE & MAINTENANCE: The touch of a soft cloth is all the maintenance the finish will ever need. Please do not use harsh or abrasive cleaners for polishing, as they may cause damage to the finish. Periodic checks are recommended to make sure that all bolts, screws and nuts are securely tightened.