


INSTALLATION INSTRUCTIONS

2" Faux Wood Blind

- Feels like real wood
- Will not crack or warp in humid climates
- Fire retardant
- Easy to install and maintain

STEP 1


Get acquainted with your new 2" Faux Wood Blind.

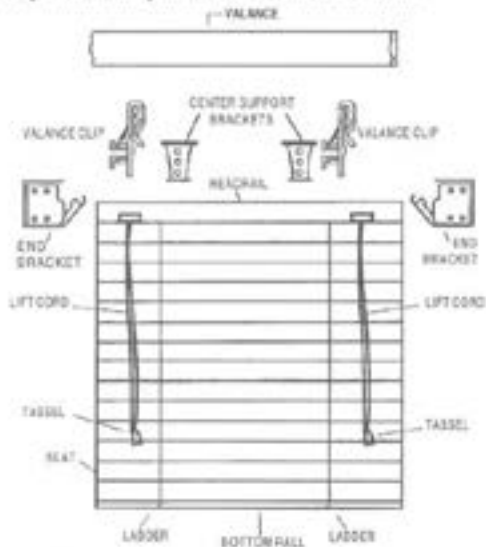

Before you start, please read all instructions carefully.

STEP 2

Check Package Contents

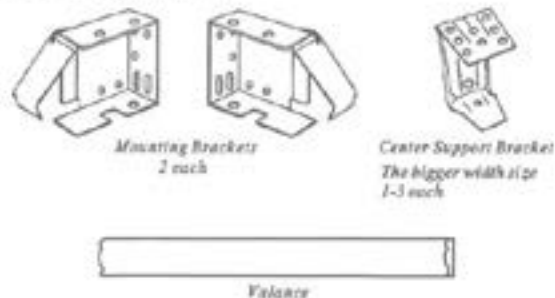

STEP 2 continued

Check Package Contents



Note: Use #6 plastic anchors for dry wall or plaster mounting.

STEP 3


Tools Required for Installation



STEP 4


Bracket Location and Installation

Your Blind has been produced to fit inside or outside your window frame.

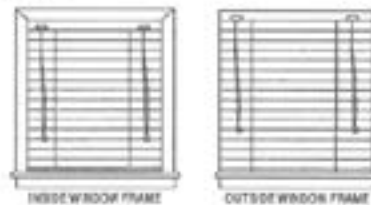

Decide on mounting/measure window

The width of the blind is 1/8 inch narrower than the size shown on the carton so that the blind will fit in the recess of a window of the stated width. For example, a 36" x 64" blind is 29 1/8" wide by 64" long. The recess must be at least 2 1/2" deep.

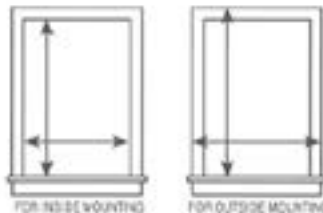


STEP 4 continued


Bracket Installation

For Figures 1, 2 and 3:

1. Hold the headrail (with brackets) in position.
2. The headrail must be level.
3. Mark the position of the brackets.
4. Remove the blind.
5. Holding the brackets in place, mark the position of at least two screw holes through each bracket.
6. Attach the brackets with two screws through the mounting holes.

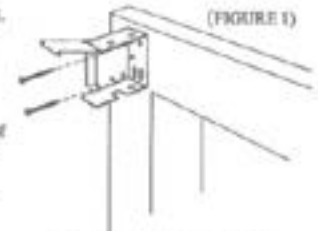

For Outside Mounting:
(Window frame or wall mounting)

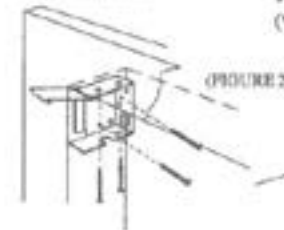

For Inside Mounting
(two screws either top or side)




For Ceiling Mounting

Install Center Support Bracket


The center support bracket can be installed or as an outside or inside mount (see figures 4 and 5).

Note: It is important when measuring to position the center holes of the right center support bracket approximately 3 1/2" from the right end of the headrail, next to but not interfering with the ladder step. This placement will insure proper support for the headrail when the blind is raised or lowered. The left center support bracket can then be positioned approximately center of the headrail.

For Outside Mounting:
(Window frame or wall mounting)



For Inside Mounting:

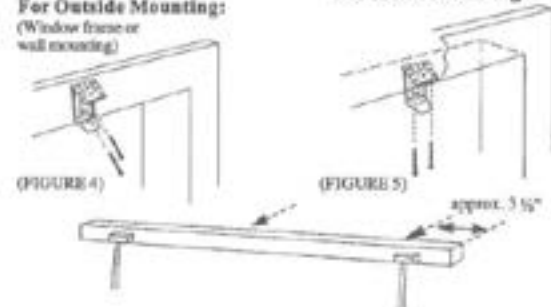

STEP 5

Valance Installation

Attach valance clips over the side of the headrail as shown in Figure 6. (Center clips are not used on all sizes.)

Put the valance between the front hooks on the valance clips; you may need to push the valance slightly until it pops in.



STEP 6

Hang the Blind.

Note: Blind may be too heavy for one person to lift - have another person help you! Keeping the blind pulled up to its shortest length, slide the headrail into the mounting brackets. When the blind is in place, close bracket covers.




STEP 7

How to shorten Your 2" Faux Wood Blind

Make sure to do this only after the blind is installed and the slats are in level position.

1. Remove bottom rail buttons with flat screwdriver. (Figure 7)
2. Untie the knot in the lift cord. (Figure 8)
3. Remove bottom rail and extra slats (carefully slide them out to the side) until you reach the desired length. (Be careful not to pull the lift cord during this operation - once the cord is removed from slats you want left in, it may be difficult to reinsert.)
4. Replace bottom rail onto ladders nearest desired length.
5. Cut off excess ladder - but leave an additional ladder step below the bottom rail (approximately 1/2 inch.) (Figure 9)
6. Re tie these ends, replace into bottom rail holes and replace buttons. (Figure 10)

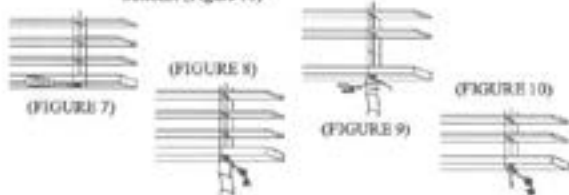

STEP 8

How to operate your 2" Faux Wood Blind

IMPORTANT: Always rotate the slats to the "open" horizontal position

before raising or lowering. This increases the life of the blind.

To lower Blind: move cord to the left, pulling down gently until the cord lock releases. Allow the cord to slip through fingers until blind reaches desired level.

Move pull cord to the right and the blind will lock automatically.

To raise Blind: pull cord downward slowly until blind lock automatically reaches desired height. Release cord and blind.

To tilt Blind: rotate cord to attain desired slat position. The closed position can only be achieved with the convex side of the slats facing into the room. This is the position to be used for maximum privacy and minimum light penetration.

CLEANING YOUR BLINDS

Dust regularly. Use soft, clean cloth, duster mitt or vacuum cleaner with brush attachment (vacuum gently).



*Achim's Family of Home Furnishings
thanks you for your most recent purchase.
We are confident this product will bring you
years of pleasure and enjoyment!*

If you have any questions
regarding installation please call Achim's
Customer Service at 1-800-54-ACHIM

Please visit our website at: www.achimonline.com

Made in China V-70

WARNING



Inner cords can pull out to form a loop, which can STRANGLE a young child.

- Inner cord stop devices can reduce this risk if positioned correctly on the pull cords.
- If inner cord stop devices are more than 6 inches (153mm) below the headrail when the blind is fully lowered, move them closer by following the inner cord stop device adjustment instructions.

ADVERTENCIA



Las cuerdas internas pueden sacarse para formar un lazo en que puede ESTRANGULARSE UN niño pequeño.

- Los dispositivos de paro de la cuerda interna pueden disminuir este riesgo si están situados correctamente en el halado de las cuerdas.
- Si los dispositivos de paro de cuerda interna son más de 2 pulgadas (50mm) por debajo del riel superior cuando está bajada completamente la persiana, muévalos siguiendo las instrucciones del ajuste de paro de cuerda interna.