

Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required. The product of Hillsdale Furniture, LLC is designed for residential use only. Customer Service Phone Number: 502-562-0000

HARDWARE LIST

- A (8) 1/4" x 5/8" Allen Bolts
- B (4) 1/4" x 1/2" Allen Bolts
- C (2) 1/4" x 1" Allen Bolts
- D (14) 1/4" Spring Washers
- E (10) 1/4" 16mm Flat Washers
- F (4) 1/4" 13mm Flat Washers
- G (4) 5x15mm Screws
- H (1) Hex Wrench

PARTS LIST

- I (1) Stool Back
- J (1) Stool Base
- K (2) Front Legs
- L (2) Back Legs
- M (1) Cross Frame
- N (1) Seat Cushion










PART	QTY	HARDWARE	PART	QTY	HARDWARE
A	8		B	4	
C	2		D	14	
E	10		F	4	
G	4		H	1	

FIGURE 2



STEP 1

Begin assembly by first attaching Stool Back (I) to Stool Base (J), by inserting into designed supports, then using 1 Allen Bolt (C), 1 Spring Washer (D) and 1 Large Flat Washer (E) per each end. Tighten all bolts. See Figure 2.

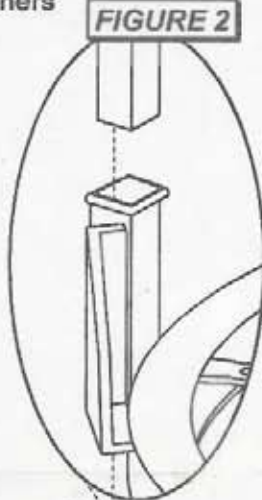

STEP 2

Attach each Front Leg (K) and each Back Leg (L) to Stool Base (J) using 2 Flat Allen Bolts (A), 2 Spring Washers (D) & 2 Large Flat Washers (E) per each leg. Do not tighten bolts for this step. See Figure 1.

STEP 3

Attach the Cross Frame (M) to each Leg (L & K) using 1 Allen Bolt (B), 1 Spring Washer (D) & 1 Small Flat Washer (F) per each leg. See Figure 1. Tighten all bolts from Figures 1 & 2.

STEP 4

Attach Seat Cushion (N) to Stool Base (J), using 4 Wood Screws (G) to hold tight. Tighten all screws. See Figure 1.

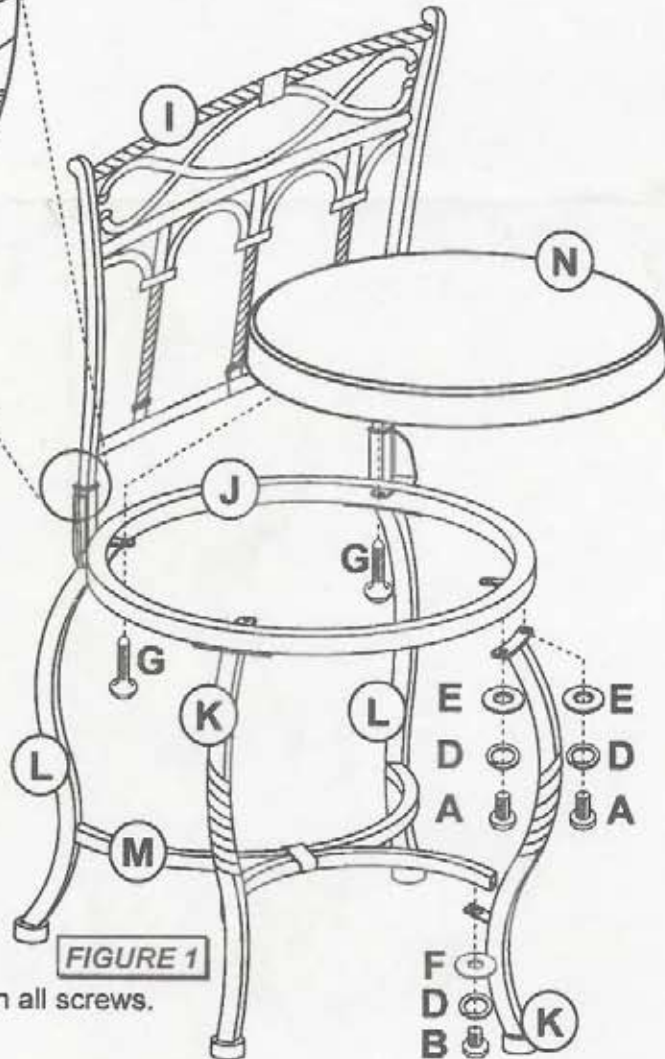


FIGURE 1

CARE & MAINTENANCE: The touch of a soft cloth is all the maintenance the finish will ever need. Please do not use harsh or abrasive cleaners for polishing, as they may cause damage to the finish. Periodic checks are recommended to make sure that all bolts, screws and nuts are securely tightened.